




1. Attach crossbar to electrical box. Leaving wires through for connection. Note: Line up with TOP, on TOP.
2. Wire fixture (See wiring guide for connections.)
3. Test with bulb making sure all is working.
4. Attach fixture to crossbar with 3 screws provided .
5. Add bulb G-9 (LED MAX 5 watts) See picture for reference.
6. Screw in the glass globe. **This is the last step to be done.**
7. NOTE: If fixture needs to be removed Please remove Globe first then the fixture from the canopy.
8. Congratulations on your fixture.

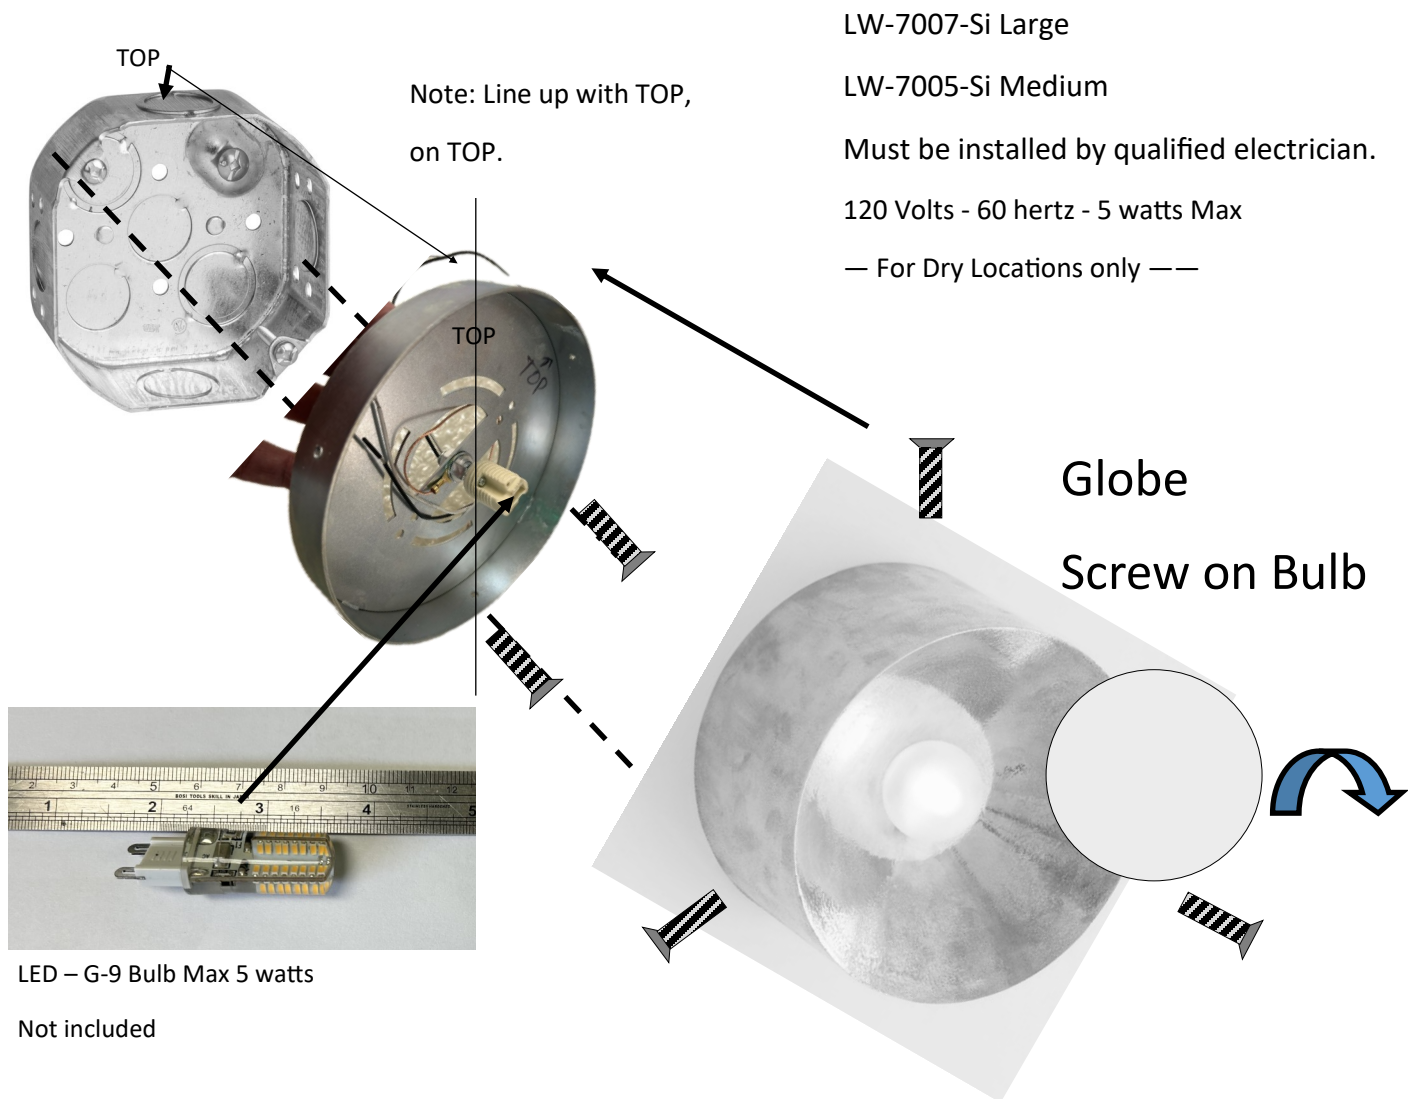