

CLEANING OF FIXTURE:

Cloth only,
NO ABRASIVES and NO CHEMICALS

ENTRETIEN:

Chiffon seulement,
AUCUN ABRASIF, AUCUN PRODUIT CHIMIQUE

CLEANING OF CRYSTAL:

1. Make sure you can dedicate enough time to cleaning before you start.
2. Remove all crystal leaves from chandelier.
3. Wash in a mild soap solution. (do not put in dishwasher), make sure pieces don't touch each other or other hard surfaces.
4. Rinse and dry thoroughly.
5. Use cloth gloves and put back on Chandelier.

WARRANTY:

This fixture has been inspected, tested, and found to be free of any electrical and structural defects. Should a problem arise due to a defective part, LATTREL CANADA INC. , will repair or replace, (at our discretion), the item free of charge. Shipping remains the responsibility of the owner.

Some conditions apply, please e-mail us for complete details.

Lattrel Canada Inc.

80 Rue De Port-Royal Est.
Montreal, Quebec,
H3L 1H7

www.lattrel.com

Questions or comments: info@lattrel.com

Series 2010

CH-750- _____



“Tomorrow’s Antiques Today”®

Congratulations on the your new CRYSTALITE purchase. Great pride and workmanship went into the manufacturing of this product . To help you enjoy it in the many years to come, please follow these recommendations for care.



Keep these instructions for future use.



185939

CRYSTAL FRAGILE

Please be careful putting this fixture together.



Assembly of Crystal:


Align crystal leaf straight from tip to the centre of the fixture.

Place through hole, place screw with allen key and tighten.

Do not over tighten

With fixtures more than 1 level all ways start from top downward.

HARDWARE

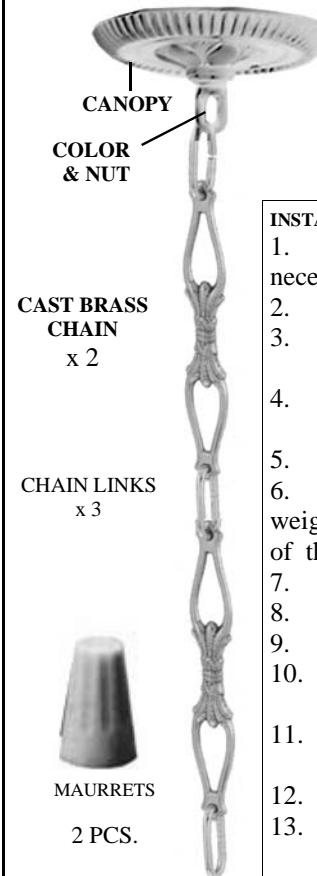


“CAUTION - RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”

“MIN 75°C SUPPLY CONDUCTORS”

**CAUTION RISK OF FIRE:
MAX 60 WATTS, TYPE G-9
FOR MORE INFO ON G-9 SEE BELOW**

INSTALLATION INSTRUCTIONS

1. Unpack fixture, and all parts, make sure all tools and parts necessary to install it are available.
2. Figure out at what height you want the fixture to be at.
3. Fit chain assembly to desired length. (distance from top of chandelier to ceiling including canopy)
4. Loosen the nut on the color and drop the canopy on the chain. (See Fig. 3)
5. Connect chain using the color with nipple to crossbar to
6. electrical box. (make sure box is able to support the weight. You need to make sure it will support double the weight of the chandelier. Consult an Electrician
7. Attach chandelier to the bottom of chain.
8. Take last look, making sure, it is at the desired height.
9. Put wire through chain and color into the electrical box.
10. Connect ground wire and the neutral and live wires (must be done by qualified electrician)
11. Push canopy back into ceiling and screw nut holding the canopy in place.
12. Add crystal and light bulbs. See page 2 for crystal assembly.
13. Congratulations on your new chandelier

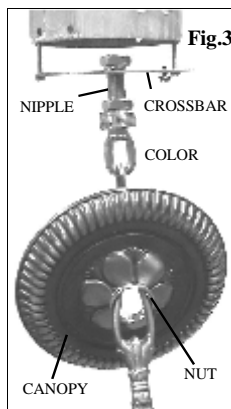

IMPORTANT G-9 SOCKETS ONLY

“ This pictogram is an indication that the lamp does not require additional shielding”



“ USE ONLY G-9 LIGHTBULBS WITH THIS SYMBOL”

REPLACING G-9 BULB: Read instructions supplied with bulb.

Bulb will become extremely hot never touch with bare hands.